

Sentinel Connector Systems Inc.


1953 Stanton Street

York, Pa. 17404

PART NO.: 203-101003-04

* TEN POSITION ULTRA LOW PROFILE JACK

* KEY 3 OPTION

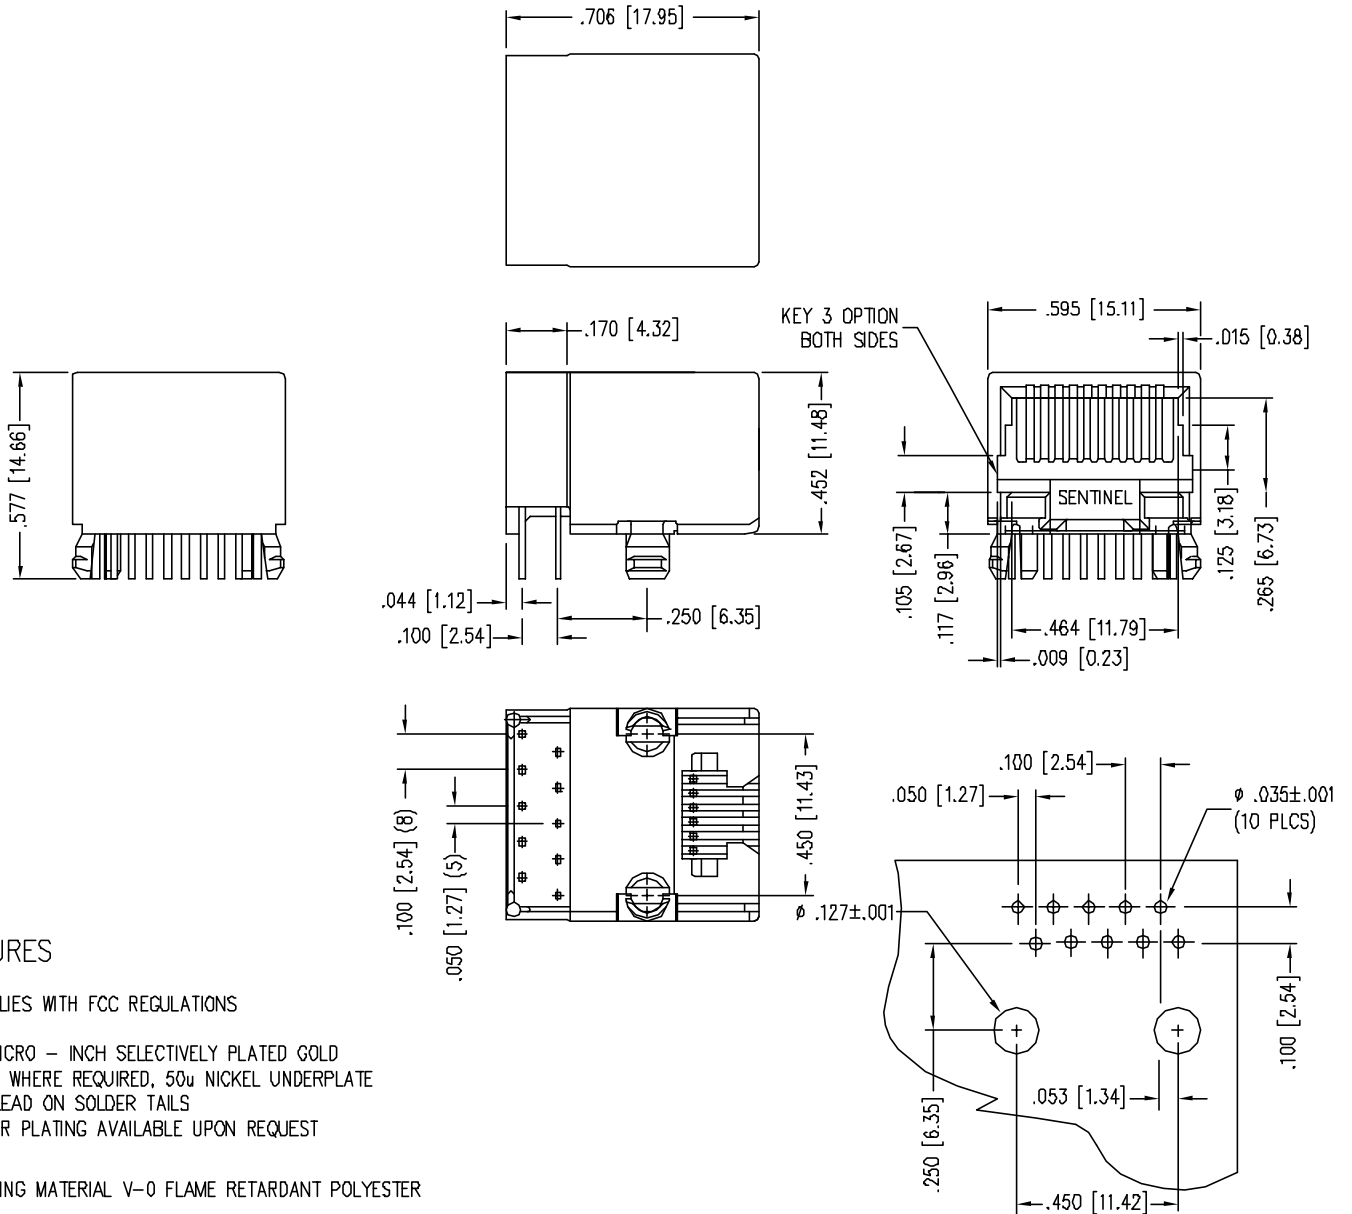

FEATURES

- ▶ COMPLIES WITH FCC REGULATIONS
- ▶ 50 MICRO - INCH SELECTIVELY PLATED GOLD ONLY WHERE REQUIRED, 50 μ NICKEL UNDERPLATE TIN LEAD ON SOLDER TAILS OTHER PLATING AVAILABLE UPON REQUEST
- ▶ HOUSING MATERIAL V-0 FLAME RETARDANT POLYESTER
- ▶ CONTACT MATERIAL - PHOSPHOR BRONZE

SPECIFICATIONS

ELECTRICAL:

- ▶ CURRENT RATING - 1.5 AMP MAX @ 25°C
0.2 AMP MAX @ 70°C
- ▶ VOLTAGE RATING - 150 VOLTS AC MAX
- ▶ DIELECTRIC WITHSTANDING VOLTAGE - 1000 VOLTS AC
RMS, 60 Hz, 1MIN

PRODUCT LINE — SIZE — OPENING — FUTURE

PART NO. = 203-101003-04XX

SERIES — # CONTACTS — KEY — CONTACT/PLATING